
Permit # 16-66560

U.S. DEPARTMENT OF HOMELAND SECURITY

· Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

# ELEVATION CERTIFICATE Important: Follow the instructions on pages 1–9.



Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	F	OR INSURANCE COMPANY USE
A1. Building Owner's Name RS PARKER HOMES, LLC	P	olicy Number:
<ul> <li>A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or Box No.</li> <li>207 DOGWOOD DRIVE</li> </ul>	P.O. Route and C	ompany NAIC Number:
City State MYRTLE BEACH South Ca		P Code 9575
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Leg- LOT 4 BLOCK 25 LONG BAY ESTATES, TM# 186-14-05-002, PIN # 446-15		
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, e	tc.) RESIDENTIAL	
A5: Latitude/Longitude: Lat. 33D38'43.362 Long. 78D56'20.00"	Horizontal Datum:	☐ NAD 1927 × NAD 1983
A6. Attach at least 2 photographs of the building if the Certificate is being us	sed to obtain flood insuran	ce.
A7. Building Diagram Number 1B		
-48. For a building with a crawlspace or enclosure(s):		
a) Square footage of crawlspace or enclosure(s)	N/A sq ft	
b) Number of permanent flood openings in the crawlspace or enclosure	(s) within 1.0 foot above a	djacent grade N/A
c) Total net area of flood openings in A8.b N/A sq in		
d) Engineered flood openings? Yes No		
A9. For a building with an attached garage:		
a) Square footage of attached garage 808.00 sq ft		
b) Number of permanent flood openings in the attached garage within 1	.0 foot above adjacent gra	ade 5
c) Total net area of flood openings in A9.b sq	in.	
d) Engineered flood openings?		
SECTION B - FLOOD INSURANCE RATE	MAP (FIRM) INFORMAT	ION
B1. NFIP Community Name & Community Number HORRY COUNTY 450104 B2. County I HORRY CO		B3. State South Carolina
B4. Map/Panel Number B5. Suffix Date B7. FIRM Panel Effective/ Revised Date 08-23-1999		se Flood Elevation(s) one AO use Base Flood Depth)
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flo		39:
B11. Indicate elevation datum used for BFE in Item B9: ⊠ NGVD 1929 [	NAVD 1988 Othe	er/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS)	area or Otherwise Protect	ted Area (OPA)? Tyes X No
Designation Date: N/A CBRS OPA		
Total of A		

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit, Suite, 207 DOGWOOD DRIVE /	and/or Bldg. No.) or P.O. I	Route and Box No.	Policy Nur	mber:	
Otty MYRTLE BEACH		ZIP Code 29575	Company	NAIC Number	
SECTION C - BUILDIN	NG ELEVATION INFORM	MATION (SURVEY	REQUIRED)		
C1. Building elevations are based on: Con *A new Elevation Certificate will be required to	struction Drawings*		truction*	Finished Construction	
C2 Elevations – Zones A1–A30, AE, AH, A (with Complete Items C2.a–h below according to the	he building diagram specifi	ed in Item A7. In Pue			
Benchmark Utilized: SCVRS		um: NGVD 1929			
Indicate elevation datum used for the elevation	MANUFACTURE AND	elow.			
		ne REE		-	
Datam used for building elevations must be to	ne same as that used for th	ie bi L.	Check	the measurement used.	
a) Top of bottom floor (including basement,	crawispace, or enclosure fl	oor)	15.54 ×	feet meters	
b) Top of the next higher floor			25.68 ×	feet meters	
Bottom of the lowest horizontal structural	member (V Zones only)		N/A	feet meters	
d) Attached garage (top of slab)			13.25 ×	feet meters	
e) Lowest elevation of machinery or equipment (Describe type of equipment and location	ent servicing the building in Comments)		15.14 ×	feet  meters	
Lowest adjacent (finished) grade next to to	building (LAG)	-	10.96 ×	feet meters	
g) Highest adjacent (finished) grade next to			13.57 ×	feet meters	
b) Lowest adjacent grade at lowest elevation structural support		g	12,88 ×	feet meters	
SECTION D - SURV	EYOR, ENGINEER, OR	ARCHITECT CERT	IFICATION		
This certification is to be signed and sealed by a large of the large	resents my best efforts to i ment under 18 U.S. Code,	interpret the data ava Section 1001.	ilable. I unde	rstand that any false	
Were latitude and longitude in Section A provided	by a licensed land survey	or? ⊠ Yes ∐ No	∑ Che	eck here if attachments.	
Certifier's Name JACQUES J. BONNETT	License Number 21431			TH CAR'	
Title PLS			nun.	S SONAL LAVOR 7	
Company Name LOWER CAROLINA SURVEYING, INC.			111111	No. 21431	
Address 3127 HWY 348	Ward 1		THE STATE OF THE S	S J BONNE	
City LORIS	State South Carolina	ZIP Code 29569		"minin"	
Signature B	Date 03-20-2018	Telephone (843) 319-8169	Ext.		
Copy all pages of this Elevation Certificate and all a	ttachments for (1) communi	ty official, (2) insurance	ce agent/comp	pany, and (3) building own	
Comments (including type of equipment and local LOWEST MACHINERY WILL BE A/C UNIT.	tion, per C2(e), if applicable	e)			

## ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURA	FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, 207 DOGWOOD DRIVE	and/or Bldg. No.) or I	P.O. Route a	nd Box No.	Policy Numbe	r:
City MYRTLE BEACH	State South Carolina	ZIP Cod 29575	е /	Company NAI	C Number
SECTION E - BUILDING FOR ZO	ELEVATION INFO			OT REQUIRED)	
For Zones AO and A (without BFE), complete Items complete Sections A, B,and C. For Items E1–E4, us enter meters.	E1–E5. If the Certific se natural grade, if av	cate is intend railable. Chec	ed to suppor k the measu	rt a LOMA or LOM prement used. In P	R-F request, Puerto Rico only,
E1. Provide elevation information for the following a the highest adjacent grade (HAG) and the lower a) Top of bottom floor (including basement,	and check the appropest adjacent grade (L/	oriate boxes t AG).	o show whet	her the elevation i	s above or below
crawlspace, or enclosure) is b) Top of bottom floor (including basement,		N/A	feet me	ters above o	or Delow the HAG.
crawlspace, or enclosure) is			feet me		or below the LAG.
E2. For Building Diagrams 6–9 with permanent floo the next higher floor (elevation C2.b in the diagrams) of the building is	od openings provided	in Section A			
E3. Attached garage (top of slab) is	L- AL A T.	N1/A			below the HAG.
E4. Top of platform of machinery and/or equipment					below the HAG.
servicing the building is  E5. Zone AO only: If no flood depth number is available.			feet me		below the HAG.
SECTION F – PROPERTY Of The property owner or owner's authorized represent community-issued BFE) or Zone AO must sign here.  Property Owner or Owner's Authorized Representations.	DWNER (OR OWNER tative who completes e. The statements in S	R'S REPRES	ENTATIVE)  B and F for	CERTIFICATION Zone A (without a	FEMA-issued or
NA	uve's Name				
Address NA		City NA		State South Carolina	ZIP Code NA
Signature	С	Date		Telephone	
Comments					
				☐ Check	here if attachments.

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.		FOR INSUF	FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, St 207 DOGWOOD DRIVE	uite, and/or Bldg. No.) or P.	O. Route and Box N	o. Policy Num	ber:
City MYRTLE BEACH	State South Carolina	ZIP Code 29575	Company N	AIC Number
SECTION	ON G - COMMUNITY INFO	RMATION (OPTION	IAL)	
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en G1.  The information in Section C was taken engineer, or architect who is authorized to the Comments area below.)  A community official completed Section C was taken in the Comments area below.)	Certificate. Complete the atter meters.  en from other documentation by law to certify elevation.	applicable item(s) and on that has been sign on information. (Indic	d sign below. Checoned and sealed by ate the source and	k the measurement a licensed surveyor, date of the elevation
G2. A community official completed Sect or Zone AO.  G3. The following information (Items G4-				
G4. Permit Number	G5. Date Permit Issued		G6. Date Certifica Compliance/O	e of ccupancy Issued
<ul><li>G8. Elevation of as-built lowest floor (including of the building:</li><li>G9. BFE or (in Zone AO) depth of flooding at G10. Community's design flood elevation:</li></ul>	edge e i To		feet meters feet meters feet meters	Datum Datum
Local Official's Name	T	itle		
Community Name	Т	elephone	West of the second	
Signature	D	ate		7/3
Comments (including type of equipment and lo	cation, per C2(e), if applica	able)		
			□ Ch	eck here if attachments.

#### **BUILDING PHOTOGRAPHS**

#### . ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number:

207 DOGWOOD DRIVE

City State ZIP Code MYRTLE BEACH 29575 South Carolina

Company NAIC Number

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

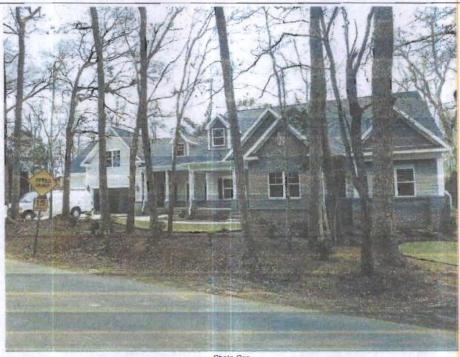


Photo One

FRONT Photo One Caption

Clear Photo One



#### **BUILDING PHOTOGRAPHS**

**ELEVATION CERTIFICATE** 

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.

Building Street Address (including Apt., Unit, Suite, and/or Bidg. No.) or P.O. Route and Box No.

207 DOGWOOD DRIVE

City

State

South Carolina

South Carolina

Section A.

FOR INSURANCE COMPANY USE

Policy Number:

Company NAIC Number

29575

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

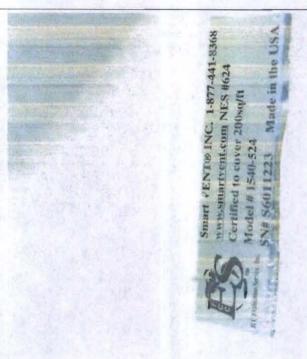


Photo Three

Photo Three Caption SMART VENT MODEL NUMBER

Clear Photo Three


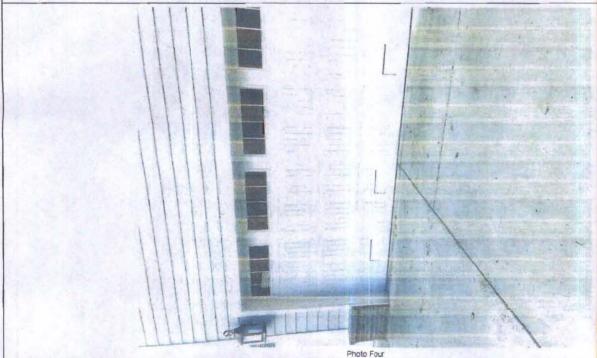


Photo Four Caption GARAGE DOOR SHOWING FLOOD VENT

Clear Photo Four

DETAIL DIAGRAM MODEL 1540-524 16" GARAGE DOOR INSULATED



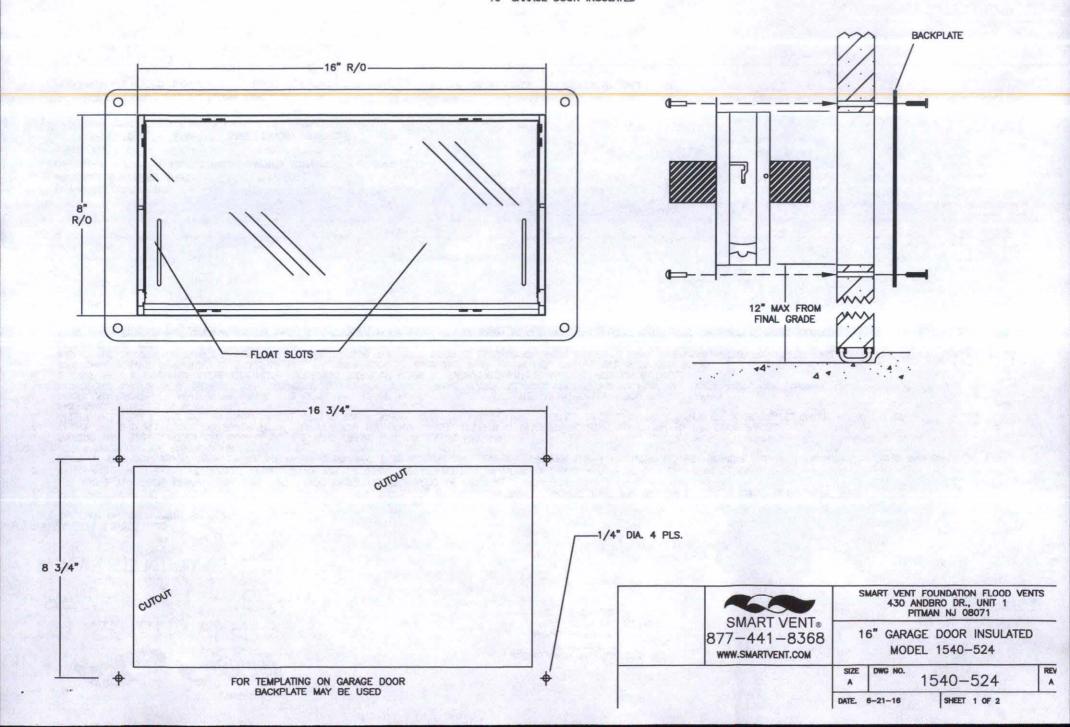

INSTALLATION INSTRUCTIONS & DETAILS MODEL 1540-524 16" GARAGE DOOR INSULATED REV. 6-21-16

INSTALLATION INSTRUCTIONS
(SEE DIAGRAM ON BACK PAGE 1 OF 2)

1. FOR EACH VENT CUT A CLEAN, SQUARE, AND LEVEL 16 " X 8 " OPENING IN THE DOOR PANEL. ENSURE THAT THE BOTTOM OF THE OPENING IS NO MORE THAN 12" ABOVE THE FINAL GRADE (DRIVEWAY). THE INSIDE BACKPLATE CAN ALSO BE USED AS A TEMPLATE.

2. REMOVE THE VENT DOOR FROM VENT FRAME. (TURN UPSIDE DOWN, ROTATE BOTTOM OF DOOR OUTWARD AND SLIDE OUT OF FRAME SLOTS)

3. POSITION THE VENT FRAME BY HAND IN THE OPENING SO THAT IT IS SQUARE AND LEVEL. TRANSFER THE 4 MOUNTING HOLES. REMOVE THE VENT FROM THE OPENING AND DRILL (4) 1/4" HOLES THROUGH THE ENTIRE DOOR..
ENSURE THAT THESE HOLES ARE SQUARE SO THE VENT FRAME AND BACKPLATE LINE UP.

CLEAN ANY AND ALL LOOSE OR SHARP METAL BURRS FROM THE DOOR PANEL. THE FRONT VENT FRAME MUST SIT FLUSH TO THE DOOR PANEL.

5. INSERT THE VENT FRAME INTO OH DOOR PANEL WITH SERIAL NUMBER LABEL ON THE BOTTOM. INSTALL BACKPLATE OVER INSIDE OF DOOR FRAME. CHECK ALIGNMENT OF PRE-DRILLED HOLES IN VENT FRAME,
DOOR AND BACKPLATE. MAKE SURE FRAME SITS LEVEL AND FRONT FLANGE IS FLUSH WITH THE FRONT OF OH DOOR PANEL. APPLY
HURRIBOND GRIP & SEAL OR EQUIVALENT ADHESIVE BEHIND VENT FRONT FRAME FLANGE TO SEAL VENT FRAME TO FACE OF DOOR PANEL. SEE DIAGRAM.

SECURE WITH 4 STAINLESS STEEL SEX NUTS AND BOLTS THROUGH DOOR TO BACKPLATE WITH FEMALE SECTION ON OUTSIDE.
 IF OVERHEAD DOOR THICKNESS IS TOO THIN, USE THE SELF LOCKING NUTS AND WASHERS IN LIEU OF THE SEX NUTS AND BOLTS.

7. INSERT THE DOOR BACK INTO THE VENT FRAME. CHECK THAT THE VENT DOOR IS LATCHED ON BOTH SIDES. TO OPEN THE VENT INSERT TWO CREDIT CARDS INTO THE FRONT FLOAT SLOTS AS SHOWN IN THE DIAGRAM.


B. VENT DOOR SHOULD NOT OPEN WHEN OH DOOR OPENS, VENT DOOR ONLY OPENS WHEN IN CONTACT WITH FLOOD WATER AND OH DOOR IS FULLY CLOSED.

DETAIL SPECIFICATIONS:
MATERIAL: STAINLESS STEEL
OPERATION FLOOD: AUTOMATIC NON-POWERED ACTIVATION AND OPERATION
INSTALLATION:

SECURED W/ 4 STAINLESS STEEL BINDING BARRELS
USE 2 1/2" BOLD AND LOCKING NUT WHERE
BINDING BARREL NUT (SNB'S) CAN NOT BE USED.
HYDROSTATIC RELIEF: 200 Sq Ft per Vent

REQUIREMENTS FLOOD: MINIMUM OF 2 VENTS PER ENCLOSED AREA MOUNTED ON AT LEAST TWO DIFFERENT WALLS

COLORS: WHITE (STANDARD)
STAINLESS STEEL, WHEAT, GRAY AND BLACK (AVAILABLE)

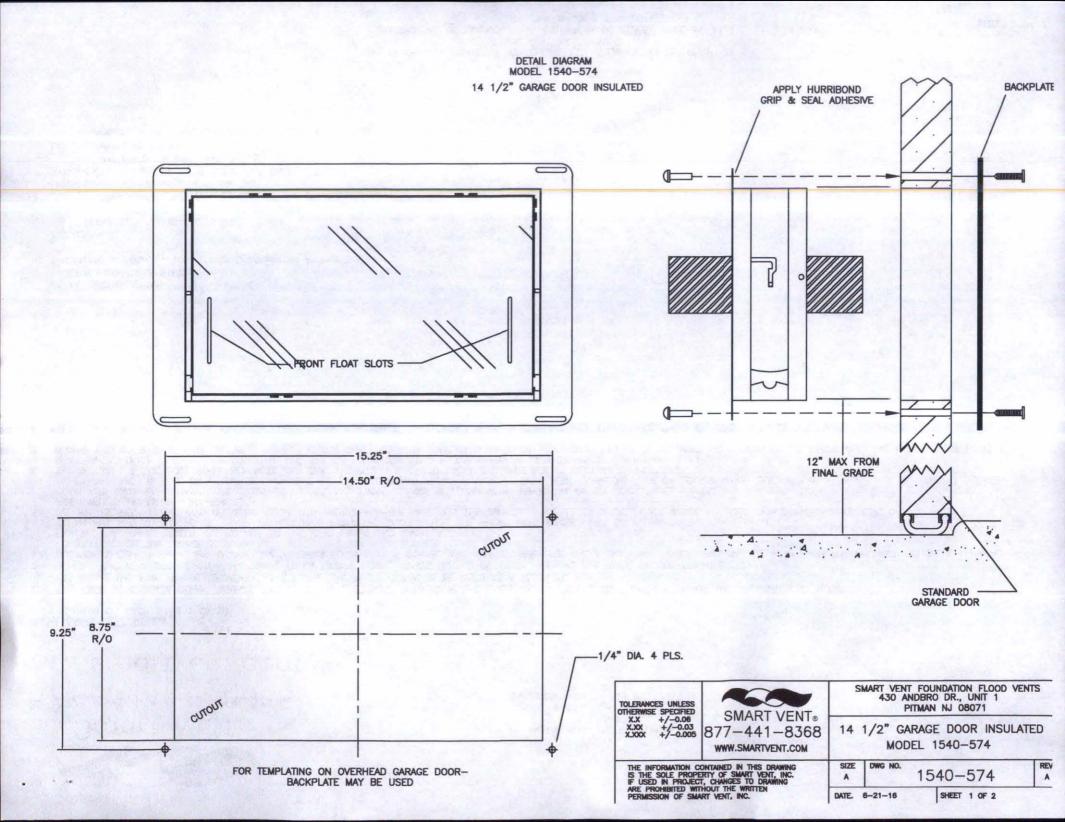



INSTALLATION INSTRUCTIONS & DETAILS MODEL 1540-574 14 1/2" GARAGE DOOR INSULATED RFV 6-21-16

INSTALLATION INSTRUCTIONS (SEE DIAGRAM ON BACK PAGE 1 OF 2)

1. FOR EACH VENT CUT A CLEAN, SQUARE, AND LEVEL 14 1/2"X8.75" OPENING IN THE DOOR PANEL. ENSURE THAT THE BOTTOM OF THE OPENING IS NO MORE THAN 12" ABOVE THE FINAL GRADE (DRIVEWAY). THE INSIDE BACKPLATE CAN ALSO BE USED AS A TEMPLATE.

REMOVE THE VENT DOOR FROM VENT FRAME. (TURN UPSIDE DOWN, ROTATE BOTTOM OF DOOR OUTWARD AND SLIDE OUT OF FRAME SLOTS)

POSITION THE VENT FRAME BY HAND IN THE OPENING SO THAT IT IS SQUARE AND LEVEL. TRANSFER THE 4 MOUNTING HOLES. REMOVE THE VENT FROM THE OPENING AND DRILL (4) 1/4" HOLES THROUGH THE ENTIRE DOOR .. ENSURE THAT THESE HOLES ARE SQUARE SO THE VENT FRAME AND BACKPLATE LINE UP.

CLEAN ANY AND ALL LOOSE OR SHARP METAL BURRS FROM THE DOOR PANEL. THE FRONT VENT FRAME MUST SIT FLUSH TO THE DOOR PANEL.

INSERT THE VENT FRAME INTO OH DOOR PANEL WITH SERIAL NUMBER LABEL ON THE BOTTOM. INSTALL BACKPLATE OVER INSIDE OF DOOR FRAME. CHECK ALIGNMENT OF PRE-DRILLED HOLES IN VENT FRAME. DOOR AND BACKPLATE, MAKE SURE FRAME SITS LEVEL AND FRONT FLANGE IS FLUSH WITH THE FRONT OF OH DOOR PANEL. APPLY HURRIBOND GRIP & SEAL OR EQUIVALENT ADHESIVE BEHIND VENT FRONT FRAME FLANGE TO SEAL VENT FRAME TO FACE OF DOOR PANEL. SEE DIAGRAM.

SECURE WITH 4 STAINLESS STEEL SEX NUTS AND BOLTS THROUGH DOOR TO BACKPLATE WITH FEMALE SECTION ON OUTSIDE.

IF OVERHEAD DOOR THICKNESS IS TOO THIN, USE THE SELF LOCKING NUTS AND WASHERS IN LIEU OF THE SEX NUTS AND BOLTS.
INSERT THE DOOR BACK INTO THE VENT FRAME. CHECK THAT THE VENT DOOR IS LATCHED ON BOTH SIDES. TO OPEN THE VENT INSERT TWO CREDIT CARDS INTO THE FRONT FLOAT SLOTS AS SHOWN IN THE DIAGRAM.

VENT DOOR SHOULD NOT OPEN WHEN OH DOOR OPENS, VENT DOOR ONLY OPENS WHEN IN CONTACT WITH FLOOD WATER AND OH DOOR IS FULLY CLOSED.

**DETAIL SPECIFICATIONS:** MATERIAL: STAINLESS STEEL OPERATION: AUTOMATIC NON-POWERED ACTIVATION AND OPERATION

INSTALLATION:

SECURED W/ 4 STAINLESS STEEL BINDING BARRELS USE 2 1/2" BOLD AND LOCKING NUT WHERE BINDING BARREL NUT (SNB'S) CAN NOT BE USED. HYDROSTATIC RELIEF: 200 Sq Ft per Vent REQUIREMENTS: MINIMUM OF 2 VENTS PER ENCLOSED AREA MOUNTED ON DIFFERENT WALLS COLORS: WHITE (STANDARD) STAINLESS STEEL, WHEAT, GRAY, AND BLACK (AVAILABLE)